



FITTING INSTRUCTIONS FOR LP0143BK LICENCE PLATE BRACKET
BMW F800GT 2013 (FOR USE WITH ORIGINAL LUGGAGE BRACKET)


Page | 1



EMS PICTURED AND LABELLED BELOW.
DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike.

THE PARTS SHOWN MAY BE REPRESENTATIVE ONLY (FOR CLARITY OF INSTRUCTIONS ONLY)

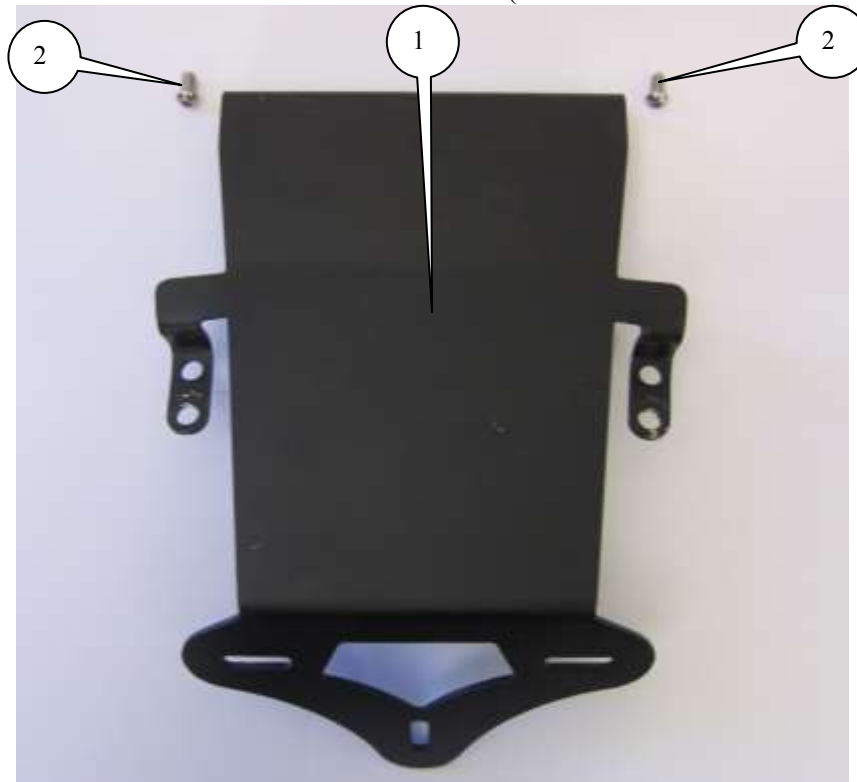



LEGEND

ITEM 1 = M6 x 12mm LONG BUTTON HEAD BOLT (x2).

ITEM 2 = LICENCE PLATE BRACKET (TB0143) (x1).


ITEM 3 = REFLECTOR (x1) NOT SHOWN.

Page | 2

Please note that in cases where kits are packed with rubber washers holding the components onto the bolt – *the rubber washers should be thrown away!*

TOOLS REQUIRED

- Set of metric Allen keys to include 4 & 5mm A/F sizes.
- T25, T30 and T45 Torx bits sockets & wrench.

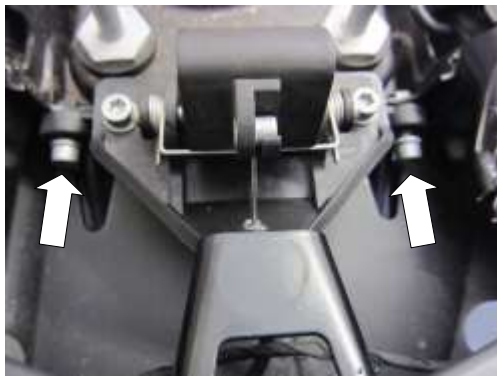

Picture 1



Picture 2



Picture 3



Picture 4



Picture 5



Picture 6



Picture 7



Picture 8

FITTING INSTRUCTIONS

- To fit the R&G tail tidy, first remove the pillion seat using the key.
- Remove the two bolts arrowed in picture 1 from under the pillion seat.
- Remove the two bolts arrowed in pictures 2 and 3.
- Remove the four bolts arrowed in picture 4.
- Remove the original licence plate bracket (this is clipped in place).
- Offer the new licence plate bracket into position (feed between the under-tray and the luggage bracket as shown in picture 5).
- Secure using the two button headed bolts as shown in picture 6.
- Refit the two original rearmost bolts through the mounting brackets on the new licence plate bracket and into the original mounts as shown in pictures 7 and 8.
- **IMPORTANT: IF FITTING A FULL-SIZE LICENCE PLATE AND PLACING IT FAR DOWN ON THE LICENCE PLATE HANGER, THERE IS A SMALL CHANCE OF THE LICENCE PLATE HITTING THE BACK WHEEL UNDER HEAVY LOAD AND OVER LARGE BUMPS IN THE ROAD. IT IS YOUR RESPONSIBILITY TO CHECK FOR THIS POSSIBILITY AND TAKE AVOIDING ACTION. FAILURE TO CHECK THIS COULD RESULT IN SERIOUS INJURY.**
- Depending on local laws, attach enclosed reflector in an appropriate location.
- Test the license plate illuminator and all lights before riding.



Instructions de montage **LP0143BK** Support de plaque
BMW F800GT 2013 (Pour utilisation avec le porte bagages d'origine)

Page | 4



Photographié et indiqué ci dessous
Assurez vous que toutes les pièces soient présentes avant de procéder au montage.

LA FAÇON DONT LE KIT EST EMBALLE NE CORRESPOND PAS FORCEMENT A LA FAÇON DE MONTER LES PIECES SUR LA MOTO.

LES PIECES PRESENTEES PEUVENT N'ETRE QUE REPRESENTATIVES, AFIN DE FACILITER ET CLARIFIER LES INSTRUCTIONS DE MONTAGE.





LEGENDE

ARTICLE 1 = M6 x 12mm Boulon (x2).

ARTICLE 2 = Support de plaque (TB0143) (x1).

ARTICLE 3 = Réfléchissant (x1) non indiqué.

Page | 5

NOTEZ QUE SI LES KITS SONT EMBALLES AVEC DES RONDELLES EN CAOUTCHOUC SERVANT A TENIR LES COMPOSANTS, CES RONDELLES DOIVENT ETRE JETEEES.

Outils requis

- Clés Allen 4 & 5mm.
- Clés Torx T25, T30 et T45.



Photo 1



Photo 2



Photo 3



Photo 4



Photo 5



Photo 6



Photo 7



Photo 8

Instructions de montage:

- Enlever le siège passager en utilisant une clé.
- Enlever les 2 boulons fléchés en Photo 1 par le dessous du siège passager. Enlever les 2 boulons fléchés en Photos 2 et 3.
- Enlever les 4 boulons (Photo 4).
- Enlever le support de plaque d'origine (clippé en place).
- Mettre le nouveau support de plaque en position (Passer entre le sous plateau et le support de bagage (Photo 5)).
- Sécuriser en utilisant 2 boulons (Photo 6).
- Remettre les 2 boulons d'origine les plus à l'arrière à travers les supports de fixation sur le nouveau support de plaque et dans les supports d'origine (Photos 7 et 8).
- **IMPORTANT: Si vous installez une grosse plaque, il y a un risque que la plaque entre en contact avec la roue arrière en cas de choc sur la route (bosse, grosse charge etc...). Il est de votre responsabilité de vérifier que cela ne puisse pas se produire. Ne pas effectuer ces vérifications peut entraîner des dommages ainsi que des blessures graves pour le pilote.**
- Selon la loi locale, monter des réflecteurs aux emplacements appropriés.
- Revérifiez que les clignotants et les feux de plaque fonctionnent bien avant de prendre la route.