



# Installation

Model specific instructions

For Harley Davidson Trike models:

- FLHTCUTG Tri Glide Ultra Classic
- FLHXXX Street Glide Trike
- FLRT Freewheeler

These instructions are a model specific add-on to the general BoosterPlug installation instructions.


## Installation Tips

- Install the BoosterPlug module as per the general installation papers.
- The picture below should help you locate the AIT sensor where the BoosterPlug is installed.
  - The AIT sensor is found in the throttle valve body between the cylinder heads.
  - Remove the air filter assembly to get access to the AIT sensor.
- You have several choices for the BoosterPlug sensor location, but our favorite place is near the steering head or under the head light.
  - Just stick to the simple rules in the general installation instructions for placing the external sensor, and you'll be fine.

## Pictures

For:

- All Trike models (2009 to 2016).

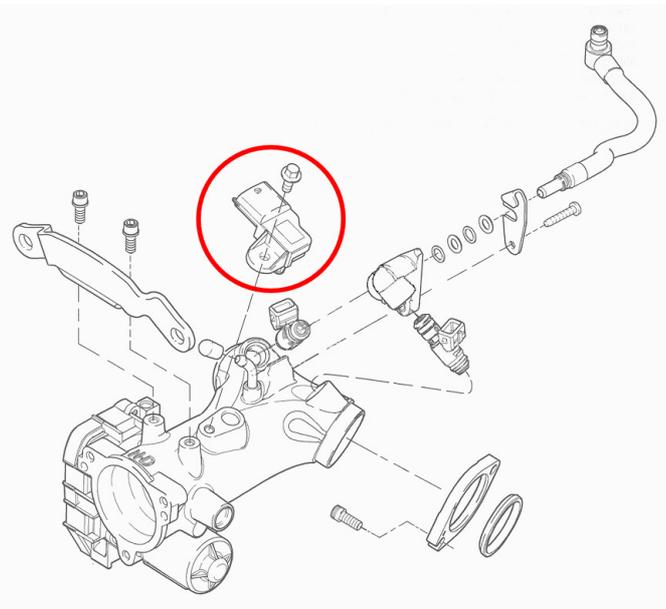

For:

- All Trike models (2017 and newer).

