



Installation

Model specific instructions

For:

- **Ducati Monster 620 + 620S**
- **Ducati Monster 695**
- **Ducati Monster 696**
- **Ducati Monster 796**
- **Ducati Monster 800 + 800S**
- **Ducati Monster 800 S2R**
- **Ducati Monster 821**
- **Ducati Monster 1000 + 1000S**
- **Ducati Monster S4R + S4RS**
- **Ducati Monster 1100 + 1100S**
- **Ducati Monster 1100 EVO**
- **Ducati Monster 1200 + 1200S**

These instructions are a model specific add-on to the general BoosterPlug installation instructions.


Installation Tips

- The pictures below should help you locate the AIT sensor where the BoosterPlug is installed.
- Install the BoosterPlug module as per the general installation papers.
- On the Monster 696, 796, and 1100 series, the AIT sensor is located in the air intake hose between the Air filter box and the throttle valve housing.
 - You have several choices for the BoosterPlug sensor location, but our favorite place is near the steering head or under the head light. Just stick to the simple rules in the general installation instructions for placing the external sensor, and you'll be fine.
- On all other Monster models, the AIT sensor is located behind the head light and below the dashboard.
 - The External sensor on the BoosterPlug is already in the right spot, so just secure it with a zip-tie so it's not flopping around.

Pictures

For:

- **Monster 696 + 796 (Top picture)**
- **Monster 1100 + 1100S + 1100 EVO (Top picture)**
- **Monster 620 + 620S + 800 + 800S (Bottom picture)**
- **Monster 800 S2R - (Bottom picture)**
- **Monster 1000 + 1000S - (Bottom picture)**
- **Early Monster S4R (2003-2006) (Bottom picture)**

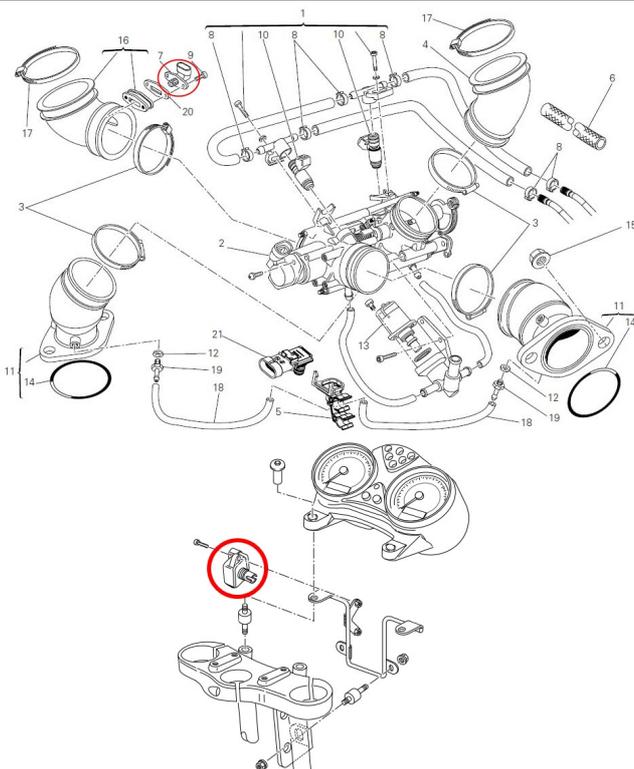

For:

- **Monster 695 (Top picture)**
- **Monster S4R Testastretta (2007-2008) (Top picture)**
- **Monster S4RS Testastretta (2006-2008) (Top picture)**
- **Ducati Monster 821 - (Bottom picture)**
- **Ducati Monster 1200 + 1200S - Bottom picture)**

